


Name: _____ Customer No.: _____
 Address: _____ Contact: _____
 City/Prov.: _____ Postal Code: _____ P.O. No.: _____ Date Req'd: _____
 Phone : (____) _____ Courier: _____ Transport: _____
 Fax: (____) _____ Pick-up: _____ Back orders: Save Cancel

Complete Order Form For Speedy Service - Fill in Customer Information and Photo-copy for Additional Orders.

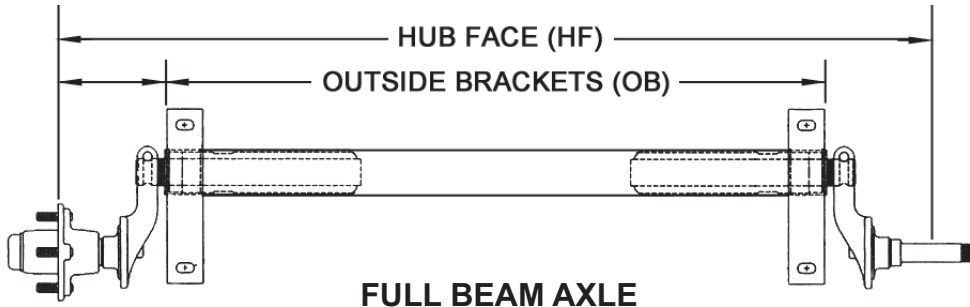

1. AXLE CAPACITY

No. of AXLES	CAP/ AXLE	No. of STUDS	EZ-LUBE SPINDLES
_____	2000	4 on 4	STND
_____	2200	5 on 4.5	STND
_____	3500	5 on 4.5	STND

2. HUB & BRAKE OPTIONS

HUBS { NO HUBS (Beam Only)
 IDLER HUBS

BRAKES { ELECTRIC
 HYDRAULIC

1. BRITISH STYLE FIXED ARM CENTERS

<input type="checkbox"/> 550 lb. 4 on 4"	4.5"
<input type="checkbox"/> 550 lb. 5 on 4.5"	4.5"
<input type="checkbox"/> 935 lb. 4 on 4"	3.5"
<input type="checkbox"/> 935 lb. 5 on 4.5"	3.5"

3. MOUNTING MEASUREMENTS

OB: _____ OUTSIDE BRACKETS
 HF: _____ HUB FACE

Sample Axle Supplied

COMMENTS: _____

4. STARTING ANGLES

REMOVE CROSS BOLT TO CHANGE ANGLE
 ALIGNMENT MARKS ON SHAFT AND ARM FOR EASY REFERENCE.

RANGE OF STARTING ANGLES AT ZERO LOAD:
 10° UP FROM HORIZONTAL
 45° DOWN FROM HORIZONTAL

9 DIFFERENT SETTINGS

NOTE: WE STRONGLY RECOMMEND THE NORMAL 34 DOWN STARTING ANGLE, EXCEPTING SPECIAL CIRCUMSTANCE.

6 UP
 0 LEVEL
 6 DOWN
 12 DOWN
 18 DOWN
 24 DOWN
 30 DOWN
 36 DOWN
 42 DOWN

1. FLEXIRIDE 1/2 Axle Set

4 on 4" HUB
 5 on 4.5" HUB

Indicate Start Angle (Box 4 left)

QUANTITY	PART NUMBER	DESCRIPTION	UNIT PRICE	TOTAL PRICE

ORDER DESK HOURS
 8:00 A.M. - 4:30 P.M.
 MON - FRI
 SHIPPING CLOSED
 12:00 - 1:00 P.M.

FEXIRIDE RUBBER AXLE
 Thank You for Your Order

Tel: 905-876-1212
 Fax: 905-878-5234 24 Hrs.